

## Benvenuto in Terrecablate!

Seguendo le semplici istruzioni di seguito riportate, potrai effettuare, dal tuo computer le configurazioni necessarie ad usufruire dei servizi ADSL di Terrecablate da te sottoscritti.

Per ogni chiarimento, ti invitiamo a contattarci al **numero verde 800 078 100**


Grazie ancora per la preferenza accordataci!

Terrecablate Reti e Servizi S.r.l.


## Manuale di installazione e configurazione Digicom Michelangelo Wave 54C

La seguente figura mostra come eseguire le connessioni tra il modem, la rete elettrica, la rete telefonica e il PC.

**Attenzione:** al fine di consentire la connessione ad Internet permettendo al contempo di utilizzare il servizio di fonia tradizionale, è necessario utilizzare il **filtro ADSL** in dotazione.

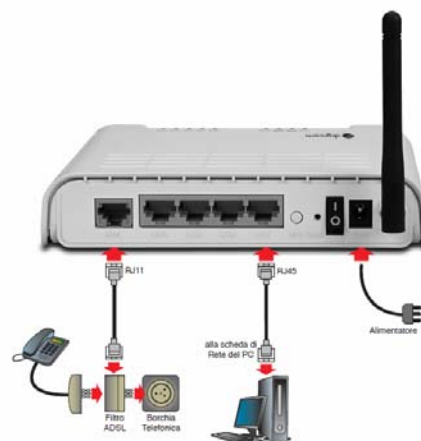

Qui sotto una visualizzazione del pannello frontale e come interpretare le spie luminose

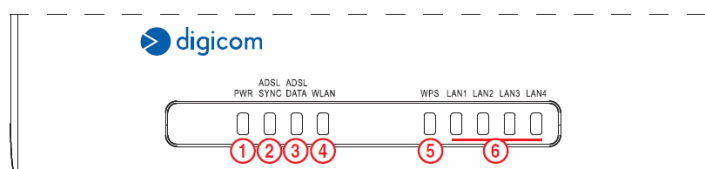

LED	DESCRIZIONE
1 POWER	Acceso: dispositivo alimentato Spento: dispositivo non alimentato
2 ADSL SYNC	Spento: Linea ADSL non rilevata o collegata Lampeggiante: durante la fase di training della linea ADSL Acceso: sincronizzazione ADSL avvenuta con successo
3 ADSL DATA	Lampeggiante: quando viene rilevato traffico dati da o verso Internet Spento: quando non viene rilevato traffico dati da o verso Internet
4 WLAN	Acceso: Interfaccia Wireless attivata Lampeggiante: quando dei dati vengono trasmessi o ricevuti sull'interfaccia Wireless Spento: Interfaccia Wireless disabilitata
5 WPS	Lampeggiante: procedura WPS in corso Spento: WPS non avviato
6 LAN 1-4	Acceso: quando la corrispondente porta Ethernet è connessa a un dispositivo di rete LAN Lampeggiante: quando dei dati vengono trasmessi o ricevuti sulla corrispondente porta Ethernet

### ATTENZIONE


Se sei un cliente **facile!casa IN RETE** il tuo Modem è già pronto, basta semplicemente collegarlo, altrimenti segui le istruzioni che seguono

La configurazione di Michelangelo Wave 54C può essere effettuata tramite Browser come ad esempio **Mozilla Firefox**, **Internet Explorer**, **Safari**, ect.

Prima di accedere al router è necessario impostare la scheda di rete Ethernet o la scheda di rete Wireless in modo tale che possa comunicare con il dispositivo.

Adesso accedere con il proprio Browser all'indirizzo <http://192.168.1.254>

## FINESTRA DI APERTURA

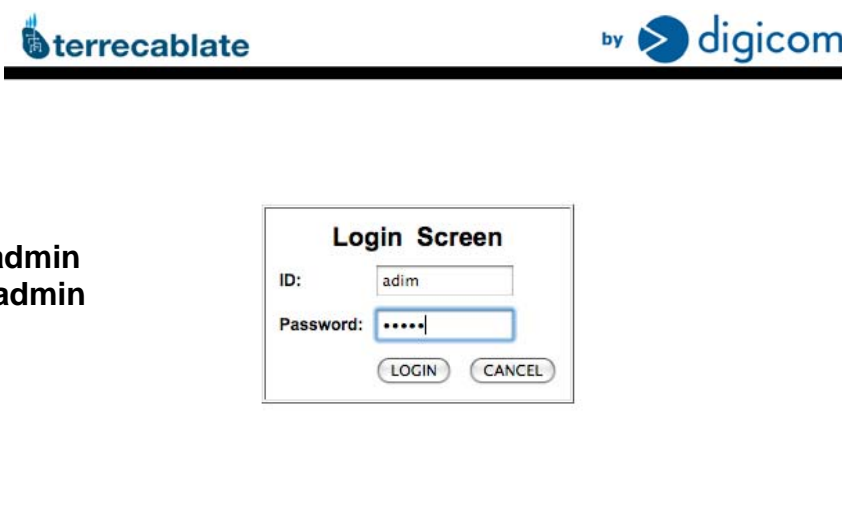

inserire come in figura

Una volta premuto **LOGIN**, compare la schermata principale

**INTERNET**  
ADSL: Physical Down

**GATEWAY**  
IP Address: 192.168.1.254  
Subnet Mask: 255.255.255.0  
DHCP Server: Enabled  
Firewall: Enabled  
UPnP: Enabled  
Wireless: Enabled

**LAN Status**

Port No.	Link	Speed
LAN1	DOWN	
LAN2	DOWN	
LAN3	DOWN	
LAN4	UP	100

**WLAN Status**

SSID	Wireless Module function	Channel	SSID Bro
terrecablante	Enable	4	Enabl

**ATM PVC**

Dal menù a sinistra cliccare **SETUP WIZARD** e premere **NEXT** fino a raggiungere lo step 3: **PARAMETERS SETTING**

The screenshot shows the '1. Getting Started' step of the setup wizard. The page header includes the 'terrecablate' logo and 'by digicom'. A navigation menu on the left lists four steps: '1. Getting Start', '2. Channel and SSID', '2. Parameter Setting', and '4. Confirm'. The main content area is titled '1. Getting Started' and contains a welcome message: 'Welcome! Thank you for purchasing this ADSL router product. By answering the following question you will be online in a few seconds and enjoy highspeed Internet Access with ADSL router.' Below this, instructions state: 'First of all, please make sure the ADSL line is connected properly. You can refer detail description in the user guide. If everything is OK. Please click 'NEXT' button.' A 'NEXT' button is located at the bottom right of the main content area.

The screenshot shows the '2. Channel and SSID' step of the setup wizard. The page header includes the 'terrecablate' logo and 'by digicom'. The navigation menu on the left highlights '2. Channel and SSID'. The main content area is titled '2. Channel and SSID' and explains: 'This page allows you to define SSID and Channel ID for wireless connection. In the wireless environment, the router can also act as an wireless access point. These parameters are used for the mobile stations to connect to this access point.' Below the text is a form with the following fields: 'ESSID' (text input with 'terrecablate'), 'ESSID Broadcast' (radio buttons for 'ENABLE' and 'DISABLE'), 'Wireless Mode' (dropdown menu with 'Mixed (11b+11g)'), and 'Channel' (dropdown menu with '4'). 'BACK' and 'NEXT' buttons are at the bottom right.

Dopo questa procedura consigliamo di personalizzare le impostazioni della rete senza fili

The screenshot shows the '3. Parameters Setting' step of the setup wizard. The page header includes the 'terrecablate' logo and 'by digicom'. The navigation menu on the left highlights '3. Parameter Setting'. The main content area is titled '3. Parameters Setting' and asks: 'Please select the network your Network Provider/Internet Provider is using :'. Below this is a form with three fields: 'Internet Service Provider', 'Protocol', and 'Management IP Address'. The 'Internet Service Provider' field has a dropdown menu open, showing a list of profiles: '-- Select Profile --', 'facile!CASA in rete', 'facile!CASA fuori rete', 'facile!IMPRESA in rete', 'facile!IMPRESA fuori rete', 'facile!IMPRESA Area Industriale', and 'Bridge over Ethernet'. 'BACK' and 'NEXT' buttons are at the bottom right.

Selezionare dal menù a tendina il proprio profilo contrattuale

- facile!casa IN RETE
- facile!casa FUORI RETE
- facile!impresa IN RETE
- facile!impresa FUORI RETE
- facile!impresa AREA INDUSTRIALE

dopodiché premere **NEXT** e alla pagina successiva premere **CONFIRM**  
 il modem è adesso configurato, comunque si consiglia di proseguire con i passi successivi per personalizzarlo.

## PER PERSONALIZZARE MODEM E RETE WIRELESS

Accedere con il proprio Browser all'indirizzo <http://192.168.1.254> inserire USERNAME **admin** e PASSWORD **admin** e premere LOGIN.

Dalla pagina principale selezionare **WIRELESS**

Nel sotto menù selezionare **CHANNEL AND SSID** e procedere alla personalizzazione del nome identificativo del vostro modem (ESSID). Per confermare premere **SAVE SETTINGS**

The screenshot shows the 'Channel and SSID' configuration page. The left sidebar contains a menu with 'WIRELESS' expanded and 'Channel and SSID' selected. The main content area has the title 'Channel and SSID' and a description: 'This page allows you to define SSID and Channel ID for wireless connection. In the wireless environment, the router can also act as an wireless access point. These parameters are used for the mobile stations to connect to this access point.' Below the text is a form with the following fields: 'ESSID' (text input with 'terrecablate'), 'ESSID Broadcast' (radio buttons for 'ENABLE' and 'DISABLE', with 'ENABLE' selected), 'Wireless Mode' (dropdown menu with 'Mixed (11b+11g)' selected), and 'Channel' (dropdown menu with '4' selected). At the bottom right are buttons for 'HELP', 'SAVE SETTINGS', and 'CANCEL'.

Nel sotto menù selezionare **WPA** e procedere alla personalizzazione della chiave di sicurezza (PRE-SHARED KEY). Per confermare premere **SAVE SETTINGS**

The screenshot shows the 'WPA' configuration page. The left sidebar contains a menu with 'WIRELESS' expanded and 'WPA' selected. The main content area has the title 'WPA' and a description: 'WPA is a security enhancement that strongly increases the level of data protection and access control for existing wireless LAN. Matching authentication and encryption methods must be setup on your router and wireless client devices to use WPA.' Below the text is a form with the following fields: 'WPA mode' (dropdown menu with 'WPA/WPA2 Mixed Mode' selected), 'Cipher suite' (dropdown menu with 'AES for both WPA and WPA2' selected), 'Authentication' (radio buttons for 'Pre-shared Key' and '802.1X', with 'Pre-shared Key' selected), 'Pre-shared key type' (radio buttons for 'Passphrase (8~63 characters)' and 'Hex (64 digits)', with 'Passphrase (8~63 characters)' selected), and 'Pre-shared Key' (password input field with 8 dots). At the bottom right are buttons for 'HELP', 'SAVE SETTINGS', and 'CANCEL'.